


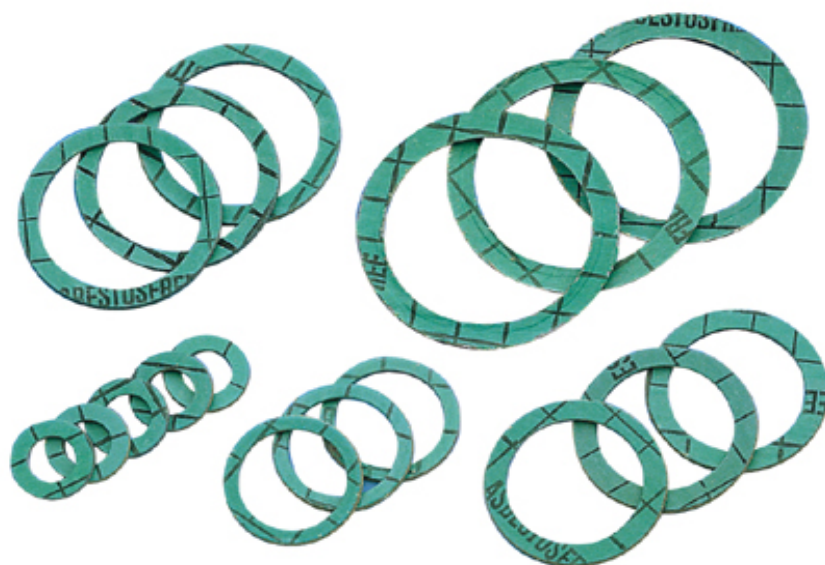

Dimensioni / Dimensions

3/8, 1/2, 3/4, 1", 1"1/4, 1"1/2, 2"

Caratteristiche / Specifications

Densità	Density	1,80	g/cm ³
Temperatura d'esercizio max	Max operative temperature	120	°C
Pressione d'esercizio max	Max operative pressure	40	bar
Resistenza a trazione	Strength	7	N/mm ²
Ritorno elastico	Spring back	50	%

misura	d.interno	d.esterno	spessore
size	inside d.	outside d.	thickness
3/8"	8,5	15	1,8
1/2"	10,5	18,5	1,8
3/4"	16	24	1,8
1"	20,5	30	2
1"1/4	30	39	2
1"1/2	36	45	2
2"	44	56	2

Norme / Norms : FDA 21 CFR/175.300 - TZW